Electrical and Control

ET5190

Voltage	100V-240V
Power	5W
Power Supply	Built-in
Control	ON/OFF
Insulation Class	Class I
Cable	0.5M H05RN-F 3x1mm²
Environmental	-20 °C ~ 50 °C

LED and Optics

LED Brand	Citizen
LED Quantity	COB X 1
Beam Angle	360°
Delivered Lumen	100lm(3000K)
Colour Rendering	CRI 80
SDCM	≤3
CCT	3000K/4000K/5000K
LED Optic	PMMA Lens

Physical

Housing	Aluminium
Lens Material	PMMA
External Screw	Stainless steel material
Surface Treatment	Anticorrosive coating
Net Weight	1.2KG
Warranty	3 years
Rating	IP65
Impact Protection	IK08

Certifications

RAL9011 RAL9006 RAL9016

Mineral bronze RAL7012 RAL7016

Photometric curves:

Surface： Scagliola
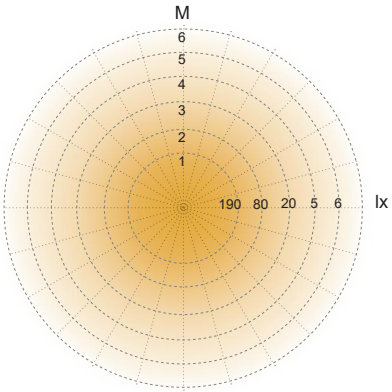
height standard, customized heights also available