

Electrical and Control

ET6161

Voltage	100V-240V
Power	44W*2
Power Supply	Built-in
Control	ON/OFF
Insulation Class	Class I
Cable	0.5M H05RN-F 3x1mm ²
Environmental	-20 °C ~ 50 °C

LED and Optics

LED Brand	Citizen / CREE
LED Quantity	COB X 2
Beam Angle	15°/24°/36°/50°/20°*50°
Delivered Lumen	3630lm*2(24°)
Colour Rendering	CRI 80
SDCM	≤3
CCT	3000K/4000K/5000K/
LED Optic	PMMA Lens



Physical

Housing	Aluminium
Lens Material	Glass
External Screw	Stainless steel material
Surface Treatment	Anticorrosive coating
Net Weight	10.5KG
Warranty	3 years
Rating	IP65
Impact Protection	IK08

Certifications



Photometric curves:

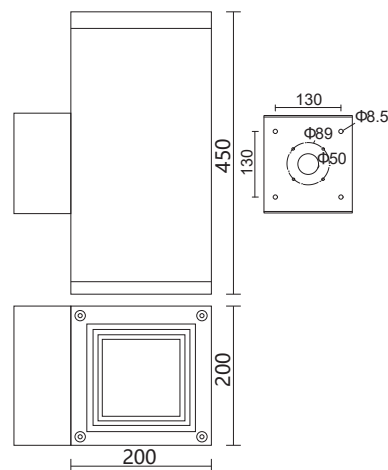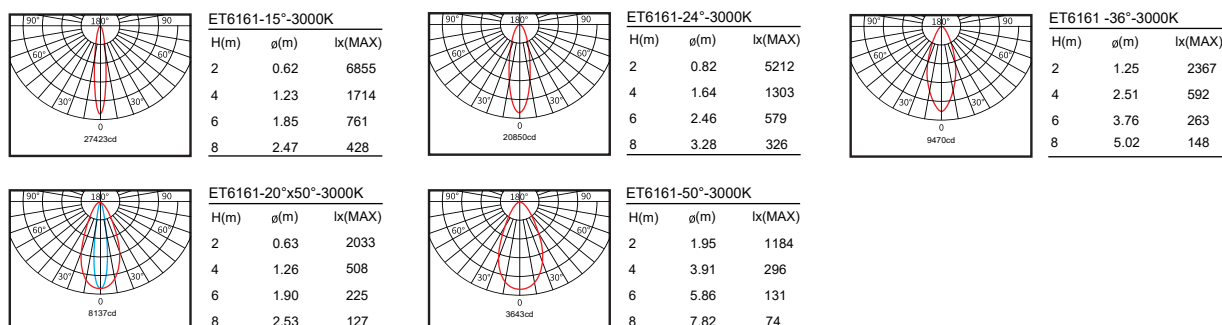

RAL9011

RAL9006

RAL9016

Mineral bronze

RAL7012

RAL7016