



Electrical and Control

ET6680

Voltage	24VDC
Power	30W
Power Supply	/
Control	ON/OFF
Insulation Class	Class III
Cable	0.5M H05RN-F 2x1mm²
Environmental	-40 °C ~ 50 °C



LED and Optics

LED Brand	Osram / CREE
LED Quantity	LED X24
Beam Angle	30°/25°*45°(RGBW)
Delivered Lumen	890lm(30° 3000K)
Colour Rendering	CRI 80
SDCM	≤5
CCT	3000K/4000K/6000K/RGBW (W=4000K)
LED Optic	PMMA Lens



Physical

Housing	Aluminum
Lens Material	Glass
External Screw	Stainless steel material
Surface Treatment	Anticorrosive coating
Net Weight	1.2KG
Warranty	3 years
Rating	IP65
Impact Protection	IK08

Certifications



Photometric curves:

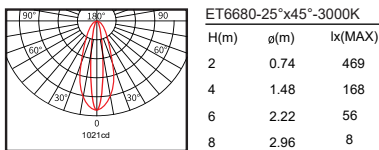

RAL9011	RAL9006	RAL9016
Mineral bronze	RAL7012	RAL7016