



Electrical and Control

ET7031

Voltage	100-240V
Power	72W
Power Supply	Built-in
Control	ON/OFF
Insulation Class	Class I
Cable	0.5M H05RN-F 3x1mm ²
Environmental	-20 °C ~ 50 °C




LED and Optics

LED Brand	LUMINUS / CREE
LED Quantity	LED X 40
Beam Angle	10°/20°/50°/90°/TYPE III
Delivered Lumen	7134lm(90° 3000K)
Colour Rendering	CRI 80
SDCM	≤5
CCT	3000K/4000K/6000K
LED Optic	PMMA

Physical

Housing	Aluminum
Lens Material	Glass
External Screw	Stainless steel material
Surface Treatment	Anticorrosive coating
Net Weight	6.7KG
Warranty	3 years
Rating	IP65
Impact Protection	IK08

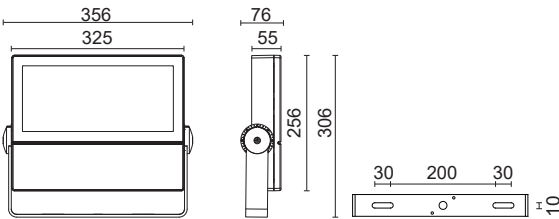

Certifications



RAL9011

RAL9006


RAL9016

Mineral bronze


RAL7012

RAL7016


Photometric curves:




H(m)	ø(m)	lx(MAX)
2	0.24	30618
4	0.49	7665
6	0.74	3402
8	0.98	1914



H(m)	ø(m)	lx(MAX)
2	0.65	6628
4	1.30	2945
6	1.94	736
8	2.59	414



H(m)	ø(m)	lx(MAX)
2	1.64	2366
4	3.28	592
6	4.92	263
8	6.56	148



H(m)	ø(m)	lx(MAX)
2	4.04	712
4	8.08	178
6	12.12	79
8	16.16	44

Accessory



ET335

Anti glare Visor

