



Electrical and Control

ET7032

Voltage	100-240V
Power	100W
Power Supply	Built-in
Control	ON/OFF
Insulation Class	Class I
Cable	0.5M H05RN-F 3x1mm ²
Environmental	-20 °C ~ 50 °C




LED and Optics

LED Brand	LUMINUS / CREE
LED Quantity	LED X 40
Beam Angle	10°/20°/50°/90°/TYPE III
Delivered Lumen	8901lm(90° 3000K)
Colour Rendering	CRI 80
SDCM	≤5
CCT	3000K/4000K/6000K
LED Optic	PMMA

Physical

Housing	Aluminum
Lens Material	Glass
External Screw	Stainless steel material
Surface Treatment	Anticorrosive coating
Net Weight	6.7KG
Warranty	3 years
Rating	IP65
Impact Protection	IK08

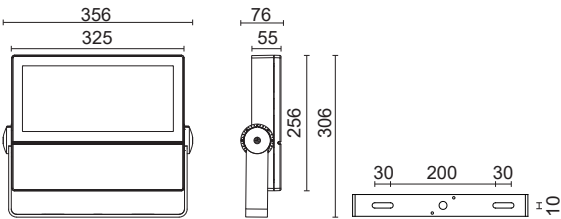

Certifications



RAL9011

RAL9006


RAL9016

Mineral bronze


RAL7012

RAL7016


Photometric curves:



H(m)	ø(m)	lx(MAX)
2	0.24	39328
4	0.49	9832
6	0.74	4370
8	0.98	2458



H(m)	ø(m)	lx(MAX)
2	1.64	2958
4	3.28	740
6	4.92	329
8	6.56	185



H(m)	ø(m)	lx(MAX)
2	4.04	969
4	8.08	242
6	12.12	107
8	16.16	60

Accessory



ET335

Anti glare Visor

