

Electrical and Control

ET7075

Voltage	220-240V
Power	20W
Power Supply	Built-in
Control	ON/OFF
Insulation Class	Class I
Cable	0.5M H05RN-F 3x1mm ²
Environmental	-20 °C ~ 50 °C

LED and Optics

LED Brand	Citizen / CREE
LED Quantity	COB X 1
Beam Angle	15°/24°/36°/50°
Delivered Lumen	1773lm(24° 3000K)
Colour Rendering	CRI 80
SDCM	≤3
CCT	3000K/4000K/5000K
LED Optic	PMMA


Physical

Housing	Aluminum
Lens Material	Glass
External Screw	Stainless steel material
Surface Treatment	Anticorrosive coating
Net Weight	2.4KG
Warranty	3 years
Rating	IP65
Impact Protection	IK08


Certifications




Photometric curves:




H(m)	ø(m)	lx(MAX)
2	0.51	4746
4	1.03	1186
6	1.55	527
8	2.06	296




H(m)	ø(m)	lx(MAX)
2	0.84	2573
4	1.68	643
6	2.52	286
8	3.36	161




H(m)	ø(m)	lx(MAX)
2	1.24	12391
4	2.49	310
6	3.74	138
8	4.98	77



H(m)	ø(m)	lx(MAX)
2	1.83	671
4	3.66	168
6	5.49	74
8	7.32	42



H(m)	ø(m)	lx(MAX)
2	0.58	1178
4	1.16	295
6	1.74	130
8	2.32	74

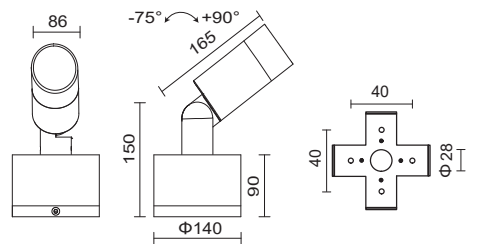

RAL9011	RAL9006	RAL9016
Mineral bronze	RAL7012	RAL7016