

Voltage	220-240V
Power	26W
Power Supply	Built-in
Control	ON/OFF
Insulation Class	Class I
Cable	0.5M H05RN-F 3x1mm ²
Environmental	-20 °C ~ 50 °C



LED and Optics


LED Brand	Citizen / CREE
LED Quantity	COB X 1 / LED X 4
Beam Angle	5°/15°/24°/36°/50°
Delivered Lumen	2201lm(24° 3000K)
Colour Rendering	CRI 80
SDCM	≤3
CCT	3000K/4000K/5000K
LED Optic	PMMA

Physical

Housing	Aluminum
Lens Material	Glass
External Screw	Stainless steel material
Surface Treatment	Anticorrosive coating
Net Weight	1.6KG
Warranty	3 years
Rating	IP65
Impact Protection	IK08



Certifications

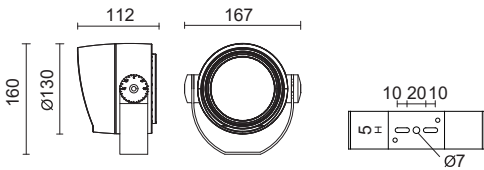

RAL9011

RAL9006


RAL9016

Mineral bronze


RAL7012

RAL7016


Photometric curves:




ET7701.5.30K			
H(m)	ø(m)	lx(MAX)	
2	0.21	8762	
4	0.43	2190	
6	0.64	973	
8	0.86	547	




ET7701.15.30K			
H(m)	ø(m)	lx(MAX)	
2	0.63	3637	
4	1.27	909	
6	1.91	404	
8	2.55	227	




ET7701.24.30K			
H(m)	ø(m)	lx(MAX)	
2	0.89	2704	
4	1.78	676	
6	2.66	300	
8	3.55	167	



ET7701.36.30K			
H(m)	ø(m)	lx(MAX)	
2	1.38	1308	
4	2.76	327	
6	4.15	145	
8	5.53	81	



ET7701.50.30K			
H(m)	ø(m)	lx(MAX)	
2	1.81	760	
4	3.62	190	
6	5.43	84	
8	7.25	48	



ET7701.2050.30K			
H(m)	ø(m)	lx(MAX)	
2	0.66	1298	
4	1.33	324	
6	2.00	144	
8	2.67	80	