



Electrical and Control

ET8829

Voltage	24VDC
Power	10W
Power Supply	/
Control	ON/OFF
Insulation Class	Class III
Cable	0.5M H05RN-F 2x1mm ²
Environmental	-40 °C ~ 50 °C



LED and Optics

LED Brand	CREE/Citizen
LED Quantity	COB X1
Beam Angle	15°/24°/46°/50°
Delivered Lumen	905lm
Colour Rendering	CRI 80
SDCM	≤3
CCT	2700K/3000K/4000K/5000K
LED Optic	PMMA Lens



Physical

Housing	Stainless steel
Lens Material	Glass
External Screw	Stainless steel material
Surface Treatment	Stainless steel
Net Weight	2.5KG
Warranty	3 years
Rating	IP68
Impact Protection	IK10

Certifications



Photometric curves:

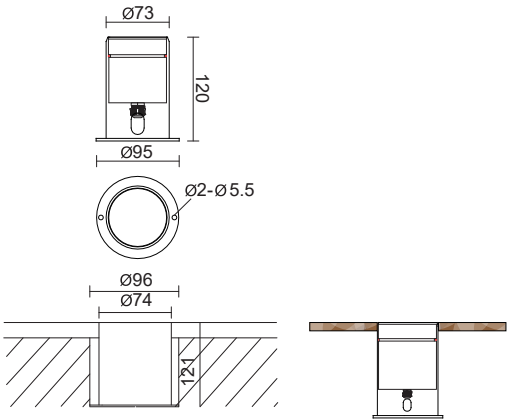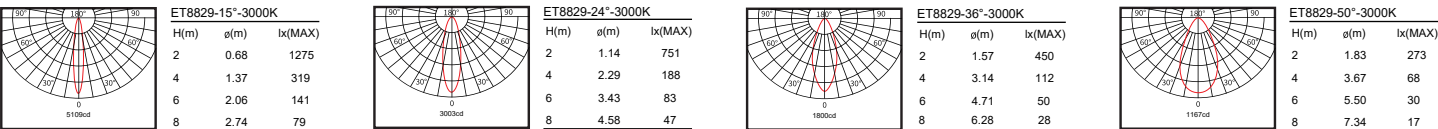

Accessories



Back light

ET245
Honeycomb louver



ET273
Anti glare lenses

